

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 E-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow - Essex CM20 2DY, UK  
 Phone: +44 1279 63 55 33  
 Fax: +44 1279 63 52 62  
 E-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 E-mail: info@jumo.us  
 Internet: www.jumo.us



# JUMO di eco Digital Indicator

76mm x 36mm format

## Brief description

The JUMO di eco compact digital indicator is used for the simple visualization of temperatures or standard signals. The measurement input permits the connection of resistance thermometers or thermocouples, or standard current or voltage signals. The measured value is shown on a 3-digit backlit display.


Limit infringements are monitored by means of a 10A relay (changeover contact) and indicated by an LED.

The 3 keys on the front panel can be used to configure, among others, the switching hysteresis and alarm suppression.

The electrical connection is made via screw terminals on the back of the instrument.

A setup program and a PC interface are available as accessories, for simple configuration and parameterization from a PC.

## Block structure

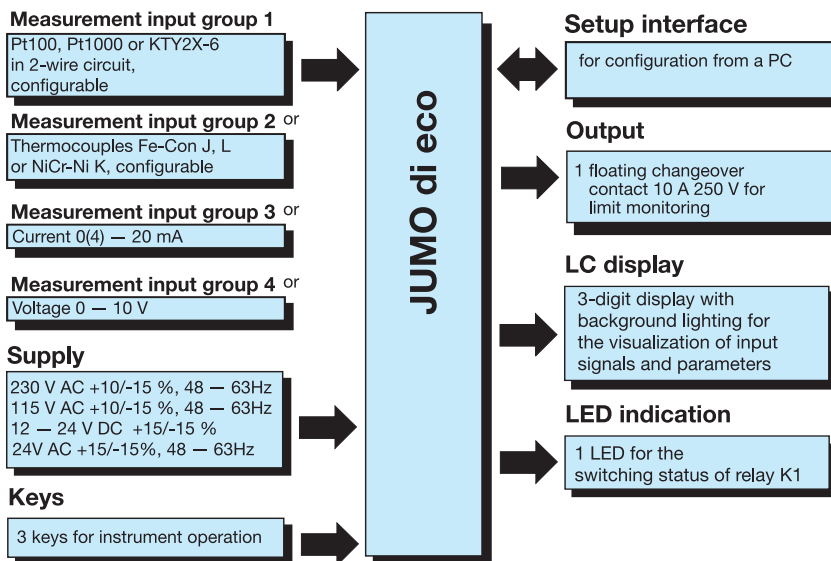

Type 701540/...

## Key features

- Limit monitoring
- Available for resistance thermometer, thermocouple, standard current or voltage signals, according to choice
- 10A relay (changeover contact)
- Adjustable switching hysteresis
- Programmable switch-on delay after power-on
- Configurable alarm suppression
- Symbols in display for temperature unit, minutes and seconds
- Parameter level protected by code
- Setup program for configuration and archiving via PC
- Customized linearization via tabular function in the setup program
- UL approval

## Displays and controls

|                          |  |
|--------------------------|--|
| <b>LC display</b>        | 3-digit segment display, 13 mm high, and symbols for temperature unit, h, min and s, with red background lighting  |
| <b>Status indication</b> | LED K1 flashes during alarm suppression<br>LED K1 lights up when limits are infringed, or on a probe error   |
| <b>Keys</b>              | <p>Ⓟ programming</p> <p>▲ increase parameter value</p> <p>▼ decrease parameter value</p> <p>Ⓟ + ▲ version display</p> <p>Ⓟ + ▼ exit, jump to basic status (temperature indication)</p> |
| <b>Setup interface</b>   | The instrument is linked to the PC via a PC interface with TTL/RS232 converter and adapter (3-pin).  |



## Technical data

| Measurement input  | Designation           | Measuring range  | Meas. accuracy <sup>1</sup> /<br>ambient<br>temperature error | Recognition of ...  |               |
|--|-----------------------|--|---|---------------------|---------------|
|  |                       |  |   | Probe short-circuit | Probe break   |
| Resistance thermometer   | Pt100 EN 60 751       | -200 to +600 °C  | 0.1%/ ≤100ppm/°C  | is recognized       | is recognized |
|  | Pt1000 EN 60 751      | -200 to +600 °C  | 0.1%/ ≤100ppm/°C  | is recognized       | is recognized |
|  | KTY2X-6 (PTC)         | -50 to +150 °C   | 1%/ ≤100ppm/°C  | is recognized       | is recognized |
|  | Resistance 0 — 3000 Ω | customer table <sup>3</sup>  | 0.1%/ ≤100ppm/°C <sup>3</sup>                                 | = 0Ω                | is recognized |
| Measuring current for Pt100: 0.2 mA, for Pt1000, KTY2X-6 and resistance: 0.02 mA   |                       |  |   |                     |               |
| Lead compensation is adjustable via the parameter Lead compensation resistance $\Delta F_r$<br>The total resistance (sensor+lead) must not exceed 320Ω for Pt100 and 3200Ω for Pt1000, KTY2X-6 or resistance.                                      |                       |  |   |                     |               |
| Thermocouple   | Fe-Con J EN 60 584    | -200 to +999 °C  | 0.4%/ ≤100ppm/°C <sup>2</sup>                                 | -                   | is recognized |
|  | Fe-Con L DIN 43 710   | -200 to +900 °C  | 0.4%/ ≤100ppm/°C <sup>2</sup>                                 | -                   | is recognized |
|  | NiCr-Ni K EN 60 584   | -200 to +999 °C  | 0.4%/ ≤100ppm/°C <sup>2</sup>                                 | -                   | is recognized |
|  | -10 to 60 mV          | customer table <sup>3</sup>  | 0.1%/ ≤100ppm/°C <sup>3</sup>                                 | -                   | is recognized |
| For the voltage input (-10 to 60 mV), terminal temperature compensation can be used for thermocouples.<br>Internal terminal temperature compensation can be switched off via the setup program (0°C).  |                       |  |   |                     |               |
| Current  | 0 — 20 mA             | -2 to 22 mA<br>scalable with $\Delta_{cL}$ and $\Delta_{cH}$ or customer table | 0.1%/ ≤100ppm/°C <sup>3</sup>                                 | -                   | -             |
|  | 4 — 20 mA             | 2.4 to 21.6 mA<br>scalable with $\Delta_{cL}$ and $\Delta_{cH}$                | 0.1%/ ≤100ppm/°C <sup>3</sup>                                 | is recognized       | is recognized |
| Input resistance $R_{IN} \leq 3\Omega$   |                       |  |   |                     |               |
| Voltage  | 0 — 10 V              | -1 to 11 V<br>scalable with $\Delta_{cL}$ and $\Delta_{cH}$ or customer table  | 0.1%/ ≤100ppm/°C  | -                   | -             |
| Input resistance $R_{IN} \geq 100k\Omega$  |                       |  |   |                     |               |
| 1.) The accuracies refer to the measuring range span.<br>2.) valid from -50°C<br>3.) A valid customer table must be entered via the setup program and switched over to $\Delta_{Ab}$ in the instrument.<br>This may reduce the measuring accuracy. |                       |  |   |                     |               |

## Additional data

|                    |   |
|--------------------|---|
| Sampling time      | 250 msec  |
| Input filter       | 1st order digital filter; filter constant $\Delta F$ adjustable from 0.1 — 99.9sec  |
| Measurement offset | adjustable from -99.9 to +99.9 via the parameter $\Delta F_L$   |
| Special features   | display of temperature unit: °C, °F (Fahrenheit) or switched off  |
| Customer table     | The setup program acquires a maximum of 20 value pairs and uses them for the linear interpolation of 20 new calibration points. |

## Ambient conditions

|  |  |
|--|--|
| Ambient temperature range                            | 0 to +55 °C  |
| Ambient temperature range with side-by-side mounting | 0 to +40 °C  |
| Storage temperature range                            | -40 to +70 °C  |
| Temperature drift                                    | ≤100ppm/°C of measuring range  |
| Climatic conditions                                  | ≤75 % rel. humidity, no condensation   |
| Cleaning and care of front panel                     | The front panel can be cleaned with all the usual cleaning and rinsing agents.<br>Do not use solvents such as methylated spirit, white spirit, P1 or xylene! |

## Output

|       |   |
|-------|---|
| Relay | 150,000 operations at 10A 250V AC 50Hz resistive load |
|-------|---|

## Supply

|                   |  |
|-------------------|--|
| Supply voltage    | 230V AC +10/-15 %, 48 — 63Hz or 115V AC +10/-15 %, 48 — 63Hz (isolated from measurement input) |
|                   | 12 — 24V DC +15/-15 %, 24V AC +15/-15 %, 48 — 63Hz (not isolated from measurement input)       |
| Power consumption | <4VA   |

**Housing**


|                    |                                  |
|--------------------|----------------------------------|
| Material           | polycarbonate                    |
| Mounting           | in panel cut-out with bezel seal |
| Operating position | unrestricted                     |
| Weight             | approx. 160g                     |
| Protection         | front IP65,<br>rear IP20         |
| Flammability class | UL 94 V0                         |

**Electrical data**


|  |   |
|--|---|
| Data backup  | EEPROM  |
| Connection   | via screw terminals for wire cross-sections up to 4 mm <sup>2</sup> solid wire<br>and 2.5 mm <sup>2</sup> stranded wire |
| EMC<br>- interference emission<br>- immunity to interference | EN 61 326<br>Class B<br>to industrial requirements  |
| Operating conditions   | The instrument is designed as a panel-mounting unit.  |
| Electrical safety  | to EN 61 010, Part 1<br>overvoltage category III, pollution degree 2  |

**Connection diagram**

Type 701540/XX1-31: Measurement input and supply voltage are not isolated from each other!

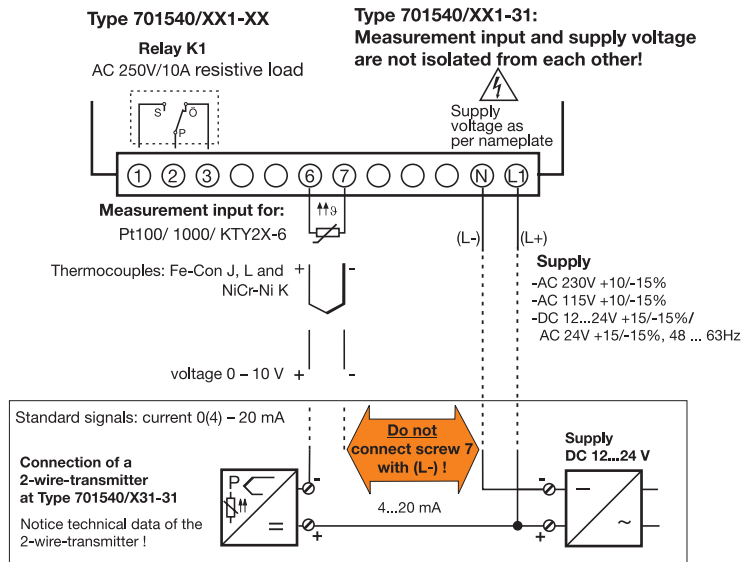

**Dimensions**

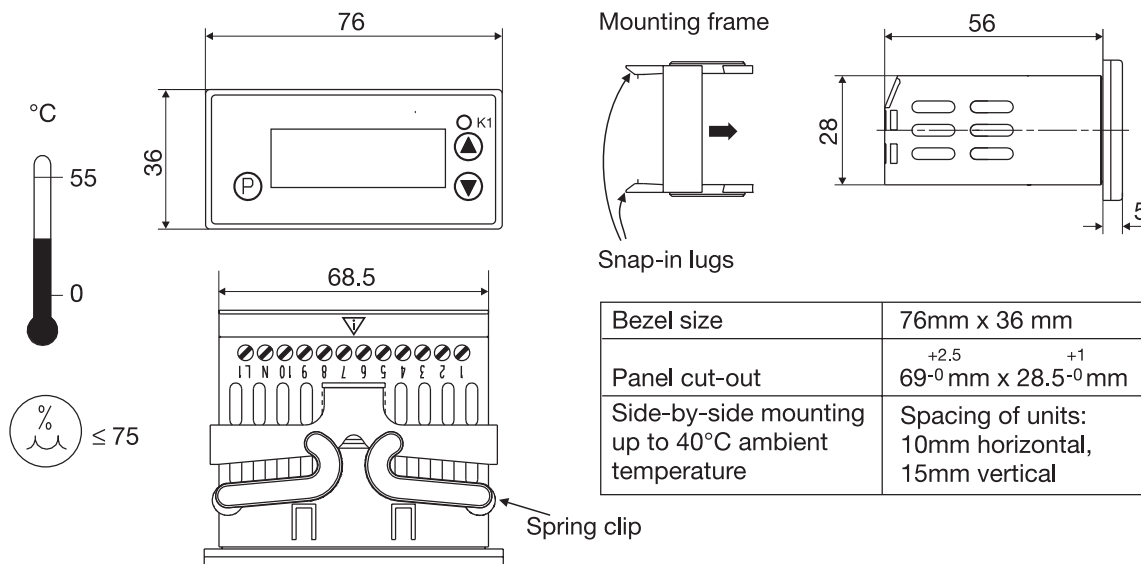

# Order details

|         |   |
|---------|---|
| 701540/ | <p><b>(1) Basic version</b><br/>JUMO di eco</p> <p><b>(2) Basic type extension Version</b></p> <p><b>8</b> factory-set, configurable within the measurement input group</p> <p><b>9</b> configured to customer specifications</p> <p><b>Measurement input group<sup>1</sup></b></p> <p><b>1</b> Pt100 in 2-wire circuit<br/>Pt1000 in 2-wire circuit</p> <p><b>2</b> KTY2X-6<br/>Fe-Con J<br/>Fe-Con L<br/>NiCr-Ni K</p> <p><b>3</b> 0 – 20 mA<br/>4 – 20 mA</p> <p><b>4</b> 0 – 10 V</p> <p><b>1</b> 1 relay (changeover contact 10A 250V)</p> <p><b>(3) Supply</b></p> <p><b>02</b> 230V AC +10/-15% 48 – 63Hz</p> <p><b>05</b> 115V AC +10/-15% 48 – 63Hz</p> <p><b>31</b> 12 – 24V DC +15/-15% /<br/>24V AC +15/-15% 48 – 63Hz</p> <p><b>(4) Approvals</b></p> <p><b>000</b> none</p> |
|---------|---|

|               |            |            |            |
|---------------|------------|------------|------------|
| <b>(1)</b>    | <b>(2)</b> | <b>(3)</b> | <b>(4)</b> |
|               |            |            |            |
| Order code    | /          | -          | -          |
| Order example | 701540     | / 811      | - 02 - 000 |

factory-set

1.) It is not possible to switch from one meas. input group to another

## Standard accessories

- 1 Operating Manual B 70.1540.0
- 1 mounting frame
- 1 bezel seal

## Accessories

Setup program, multilingual  
PC interface with TTL / RS232C converter and adapter (pins)

Suitable transducers can be found in these data sheets:

- 90.2050 Push-in resistance thermometers
- 90.2150 Screw-in resistance thermometers
- 90.1020 and subsequent ones for screw-in thermocouples
- 90.1110 and subsequent ones for push-in thermocouples
- 90.1210 Mineral-insulated thermocouples

M. K. JÜCHEM GmbH & Co.  
Hauptstraße 13, 36035 Fulda, Germany  
Lehrstraße 14, 36035 Fulda, Germany  
Postfach 36035 Fulda, Germany

Telefax: 0561 6003-224  
Telefon: 0561 6003-100  
E-Mail: mail@jumo.net  
Internet: www.jumo.net

Typenblatt 91.020 Seite 1/3

**Einsteck-Widerstandsthermometer mit Anschlussleitung**

■ Für Temperaturen von -65...+400°C  
■ Als Einleit- und Doppelmesswiderstandsthermometer  
■ Als Zwei- oder Vierleiterschaltung  
■ Anschlussleitung PVC, Silikon, Teflon, Metallgeflecht

Einsteck-Widerstandsthermometer werden benötigt für Temperaturmessungen in Rohrleitungen und geschlossenen Medien. Einlegeblech anpassen sich unter anderem mit einem 45°-Winkelbereich, im Bereich -100...+100°C geeignet. Bei Übergang der Anschlussleitung in die nach Ausführung sind die Anschlussleitungen für Drahtseile oder flexible Rohre in Temperaturbereich von -100...+300°C geeignet. Bei Übergang der Anschlussleitung in Kupferblech. Ein Korkblech kann als Sperrgefäß verwendet werden.  
In den Messbereich ist einwertig von 0...100°C Temperaturmessung nach DIN EN 60 755 Klasse B in Zweileiterschaltung einwertig möglich und auch Ausführengeräte mit Pt 100 oder Pt 1000. Die Anschlussleitung ist einwertig in Zweileiterschaltung möglich.

**Technische Daten**

Anschluss Drahtseile, mit Adresskabeln, mit Steckfilzen oder mehrlagige Drahtgeflechtselemente  
PVC: Umgebungs-temperatur -6...+100°C  
Silikon: Umgebungs-temperatur -65...+100°C  
Teflon: Umgebungs-temperatur -100...+200°C  
Metallgeflecht: Umgebungs-temperatur -65...+200°C  
Anschlussleitung: einwertig oder zweiwertig  
Einlegeblech: 4,4x7, 0,5mm, 0,5mm, 0,5mm und 0,5mm, Messing 0,5mm  
Messbereich: Pt 100: Temperaturbereich DIN EN 60 755, K, R, Zweileiterschaltung  
Anschlussblech: L<sub>1</sub> ca. 150, in Klasse C 2 m, 0,5mm  
Zustand: Schmelzblech siehe Typenblatt 90.071 und 90.240

M. K. JÜCHEM GmbH & Co.  
Hauptstraße 13, 36035 Fulda, Germany  
Lehrstraße 14, 36035 Fulda, Germany  
Postfach 36035 Fulda, Germany

Telefax: 0561 6003-224  
Telefon: 0561 6003-100  
E-Mail: mail@jumo.net  
Internet: www.jumo.net

Typenblatt 91.020 Seite 1/3

**Einschraub-Widerstandsthermometer**

Temperaturmessungen in der Umgebung dieser Elektroblech sind in Einwertig- oder Zweileiterschaltung möglich. Eine- und Zweileiterschaltung möglich. Eine- und Zweileiterschaltung möglich. Eine- und Zweileiterschaltung möglich.

Einlegeblech, mit Adresskabeln, mit Steckfilzen oder mehrlagige Drahtgeflechtselemente  
PVC: Umgebungs-temperatur -6...+100°C  
Silikon: Umgebungs-temperatur -65...+100°C  
Teflon: Umgebungs-temperatur -100...+200°C  
Metallgeflecht: Umgebungs-temperatur -65...+200°C  
Anschlussleitung: einwertig oder zweiwertig  
Einlegeblech: 4,4x7, 0,5mm, 0,5mm, 0,5mm und 0,5mm, Messing 0,5mm  
Messbereich: Pt 100: Temperaturbereich DIN EN 60 755, K, R, Zweileiterschaltung  
Anschlussblech: L<sub>1</sub> ca. 150, in Klasse C 2 m, 0,5mm  
Zustand: Schmelzblech siehe Typenblatt 90.071 und 90.240